



PES-40-PW



Features

- Energy efficient
- Corrosion resistant body
- Built-in flow control
- Bottom intake
- 6' power cord
- 2.1' maximum lift
- 5 watts
- Discharge accepts 3/8" or 1/2" I.D. tubing


Construction

- Motor — Wet-rotor (hysteresis) epoxy encapsulated
- Intermittent Liquid Temp. up to — 120°F
- Discharge — 3/8" or 1/2" Slip
- Housing — ABS
- Cover — ABS
- Volute — ABS
- Impeller — Nylon
- Screen — ABS
- Motor Shaft — Stainless steel


PondWorks® statuary and fountain pumps are designed to enhance your water gardening experience, providing you with beauty and serenity through the sights and sounds of a waterfall, stream or fountain spray nozzle. The mag drive pumps are designed to operate with minimal energy consumption, resulting in low operating costs. The compact size is ideal for use in statuary and fountains of all sizes, as well as limited space applications. PondWorks® statuary and fountain pumps are designed for submersible use and continuous operation, providing you with low maintenance and peace of mind.

PES-40-PW

3/8" DISCHARGE ADAPTOR

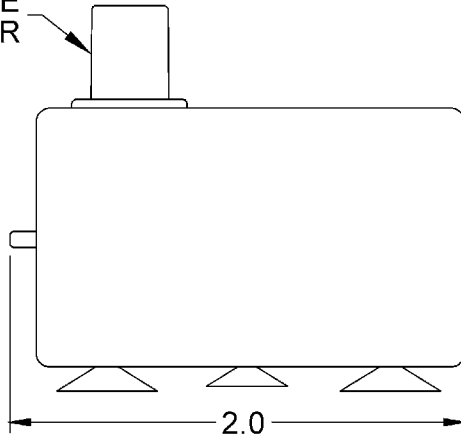


FLOW CONTROL VALVE FULLY OPEN

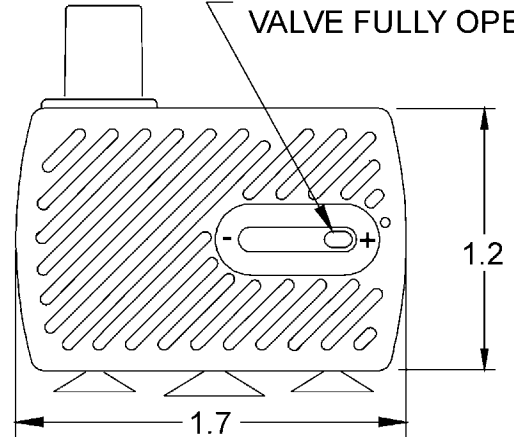

Specifications

Model No.	Item No.	Discharge	Listings	HP	Volts	Hertz	Amps	Watts	Performance (GPH @ Head)		Shut Off		Pwr. Cord (ft.)	Weight (lbs.)	Height	Length	Width
									0'	1'	Feet	PSI					
PES-40-PW	566280	3/8" or 1/2" Slip	cULus	N/A	120	60	0.03	2.5	65	45	2.10	0.9	6	1.00	1.20	2.00	1.70

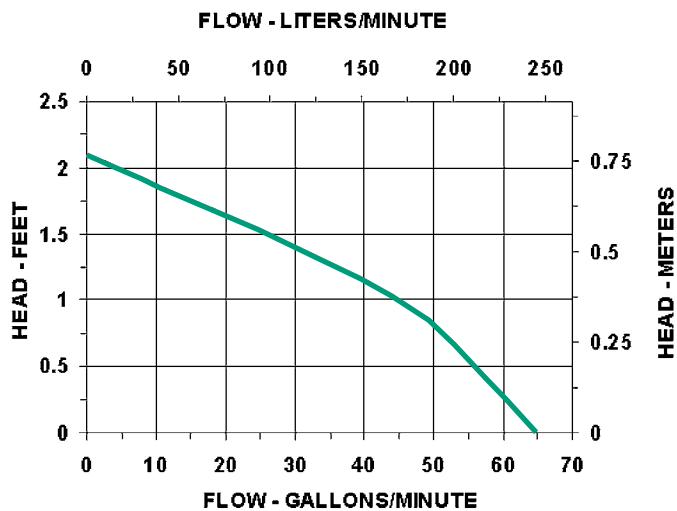

PES-40-PW

Head (ft.)	Flow (GPH)	Head (m)	Flow (LPH)
0	65	0.0	246
1	45	0.3	170
2	5	0.6	19
2.1	0	0.6	0

Little Giant

PO Box 12010 • Oklahoma City, OK 73157
 Phone: 888.956.0000 • Fax: 800.701.8046
 E-mail: customerservice@littlegiant.com